



# LIFE™

## Product Specifications

# #4650

## PVA Sealer

**Description:** A professional quality acrylic all purpose, water thinned interior primer formulated with excellent sealing and holdout characteristics.

**Use:** A good, quick drying, hi hide base for either oil or water base paints.

**Recommended Surfaces:** Interior

- ✓Wood
- ✓Concrete
- ✓Wallboard
- ✓Drywall

### Advantages

- ✓Fast dry and recoat time
- ✓Excellent sealing
- ✓Easy sanding
- ✓Can be tinted to light colors


**Finish:** Flat

**Package Size:** Quart, Gallons, 5 Gallons

**Color:** White

**Surface Preparation:** All surfaces must be free of dirt, oil, soot, excessive or peeling paint, chalk or other contaminates. Use what is necessary such as a wire brush, scraper, sandpaper, steel wool and even sandblasting if the problem is too extensive. As a final test, be sure that whatever is left cannot be removed with a sturdy fingernail. We recommend that you finally CLEAN ALL SURFACES by washing thoroughly with a strong solution of Trisodium phosphate. Rinse completely with clear water.

**Mildew:** DO NOT PAINT OVER MILDEW. Mildew is a fungus, brown, black, grey or even white in color, and will rapidly grow through any coating applied over it. A solution of 50% household bleach and 50% water will kill the mildew. Rinse thoroughly. See precautions on bleach label for handling before using.

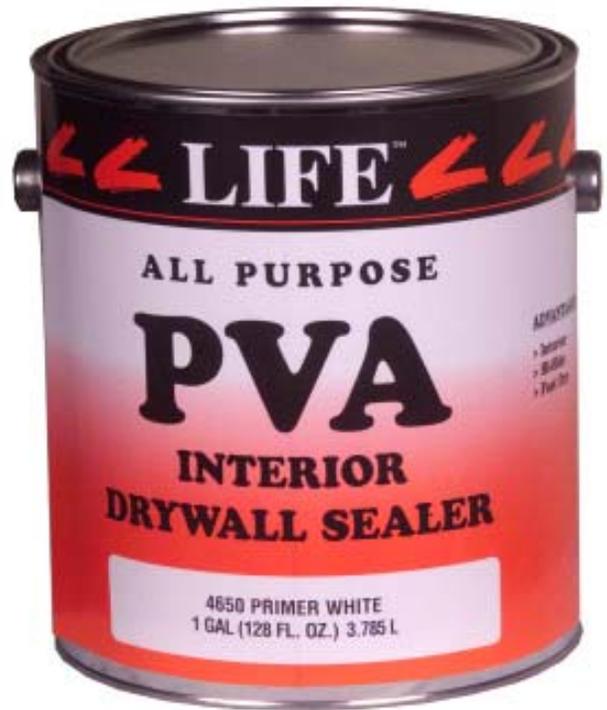

**Unpainted Surfaces:** Prime all unpainted drywall and wood surfaces with this primer.

**Glossy Surfaces:** For adhesion and ease of application, glossy surfaces must be roughened by sanding because water base products will not adhere well to glossy surfaces.

**Water Stains:** Block out all water stains with #4450 oil base or #7075 water base stain blocking primer.

**Application:** Brush, roller or spray.

**Coverage:** Up to 400 sq. ft per gallon on smooth surfaces, from 150 to 300 sq. ft. per gallon on rough, textured or porous surfaces.

**Drying Time:** Dries in 2 hours. Can recoat in 4 hours under normal temperature conditions.

**Thinning:** If necessary- a small amount of water, but do not over-thin.

**Clean-up:** Water

**CAUTION:** Do not apply if temperatures are below 50°F or are expected to drop within 24 hours.

#### Technical Information

<b>Type:</b>	Acrylic Emulsion	<b>Viscosity:</b>	90 KREBS units at 77°F
<b>Diluent:</b>	Water	<b>Flash Point:</b>	200°F
<b>Solids Content:</b>	48-52% by weight 32-36% by volume	<b>Maximum V.O.C.:</b>	100 grams per liter

This product contains chemicals known to the State of California to cause cancer, birth defects and reproductive harm. The maximum V.O.C. of this product does not exceed 100 grams/liter. WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. Contact the National Lead Information Hotline at 1-800-424-LEAD or log on to [www.epa.gov/lead](http://www.epa.gov/lead).