



LIFE™

Product Specifications

"07" Series Interior/Exterior Latex Semi-Gloss

Description: A semi-gloss enamel for use in service areas where a high degree of washability is expected

Use: A good quality, semi-Gloss Enamel for use in service areas where a high degree of washability is expected.

For use on

- *Wood
- *Primed Metal
- *Wallboard
- *Dry Wall

Advantages:

- *Low cost
- *Interior & Exterior
- *Tintable

Finish: Semi-Gloss

Package Size: Gallons, Fives

Colors:

- 00 White
- 16 Swiss Coffee
- 19 Classic Navajo White

Surface Preparation: All surfaces must be free of dirt, oil, soot, excessive paint chalk or other contaminants. A thorough washing with a T.S.P. solution is recommended to remove these contaminants. Rinse completely with clear water. Remove all wallpaper and all glue before painting. Patch all holes with spackle and sand smooth. Spot prime all patched areas .

Mildew: DO NOT PAINT OVER MILDEW.

Mildew is a fungus, brown, black, grey or even white in color, and will rapidly grow through any coating applied over it. A solution of 50% household bleach and 50% water will kill the mildew. See precautions on bleach label for handling before using.


Application: Brush, roller or spray

CAUTION: Apply at temperatures above 50°F

Unpainted Surfaces: Prime all unpainted drywall and wood surfaces with primer.

Technical Information

Type:	Vinyl Acrylic
Diluent:	Water
Solids Content:	42% by weight 28% by volume
Viscosity:	95 KREBS units at 77°F
Flash Point:	200°F
Maximum V.O.C.:	50 grams per liter

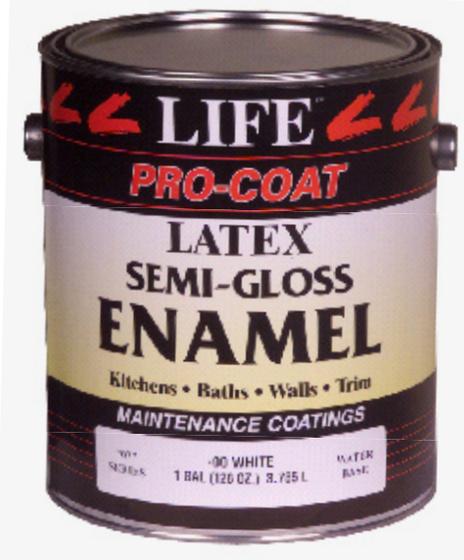

Glossy Surfaces: For adhesion and ease of application, glossy surfaces must be flattened by sanding or by using a flat acrylic or oil based primer. Latex base or water base products will not adhere well to glossy surfaces. See "SURFACE PREPARATION".

Water Stains: Block out all water stains with a pigmented stain blocking primer before applying finish coat.

Coverage: Up to 400 sq. ft per gallon on smooth surfaces, up to 150 to 300 sq. ft per gallon on rough, textured or porous surfaces.

Thinning: If necessary, a small amount of water, but do not over-thin.

Drying Time: Dries in 2 hours. Can recoat in 4 hours.

Clean-up: Clean tools and hands with warm soapy water and rinse thoroughly.

WARRANTY: When the warranted product is applied in accordance with label instructions and common sense widely accepted painting practice and procedures, Life Paint will warrant said product against manufacturing defects that might cause premature failure such as blistering, peeling, or unusual wear. Directions are as complete as possible but cannot encompass all conditions, applications, and/or surfaces beyond manufacturer's control. In the event of a warranted failure and upon the presentation of proof of purchase, the remedy will be the provision price for said product. This warranty does not include labor or the costs associated with labor. This warranty may not be transferred or assigned and extends specific legal rights which may vary from state-to-state. No other warranty is expressed or implied.

This product contains chemicals known to the State of California to cause cancer, birth defects and reproductive harm. The maximum V.O.C. of this product does not exceed 50 grams/liter. **WARNING!** If you scrape, sand or remove old paint, you may release lead dust. **LEAD IS TOXIC.** Contact the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.